

AUKEY

User Manual


Smart Plug

Thank you for purchasing the AUKEY SH-PA1 Smart Plug. Please read this user manual carefully and keep it for future reference. If you need any assistance, please contact our support team with your product model number and Amazon order number.

Package Contents

Smart Plug
User Manual
Warranty Card

Product Diagram

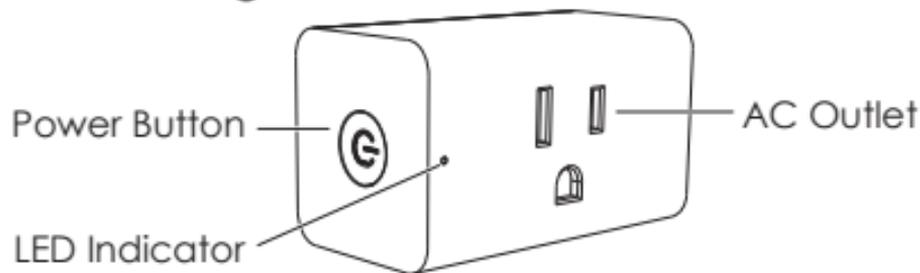

Specifications

Model	SH-PA1
Input	AC 110–125V 15A
Output	AC 110–125V 15A
Maximum Load	15A
Maximum Power Output	1800W
Apps Supported	Amazon Alexa, Google Home, IFTTT
System Requirements	iOS 8 / Android 5.0 or higher
Operating Temperature	32°F – 104°F (0°C – 40°C)
Dimensions	63 x 37 x 33mm / 2.48" x 1.46" x 1.3"
Weight	79g / 2.78oz

Getting Started

Compatibility Requirements

- A smartphone or tablet running iOS 8 / Android 5.0 or higher
- A 2.4GHz Wi-Fi connection

Installing the App

Search for **Smart Life** on the Apple App Store / Google Play or scan the QR Code and download the app.



Setting up the Smart Plug


1. Plug the SH-PA1 into a wall outlet
2. Plug your AC-powered device into SH-PA1's outlet

NOTE: Don't exceed the maximum power output of 1800W


3. Connect your phone or tablet to your 2.4GHz Wi-Fi network

NOTE: Smart plug only supports 2.4GHz (not 5GHz) networks


4. Launch **Smart Life** app and log in. For first time users, follow the in-app instructions to register

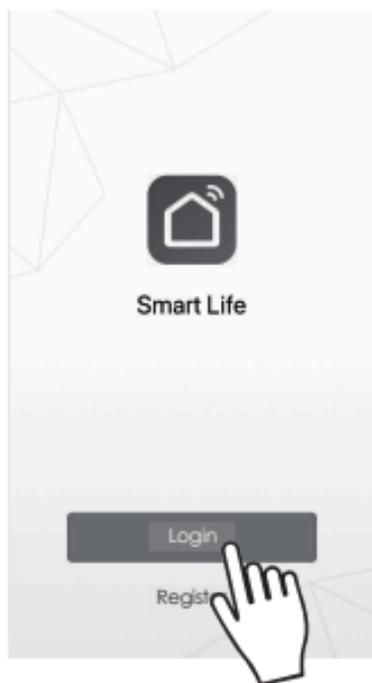


5. Once logged in, select **Add Device** and select the device type that you have plugged into the smart plug from the list

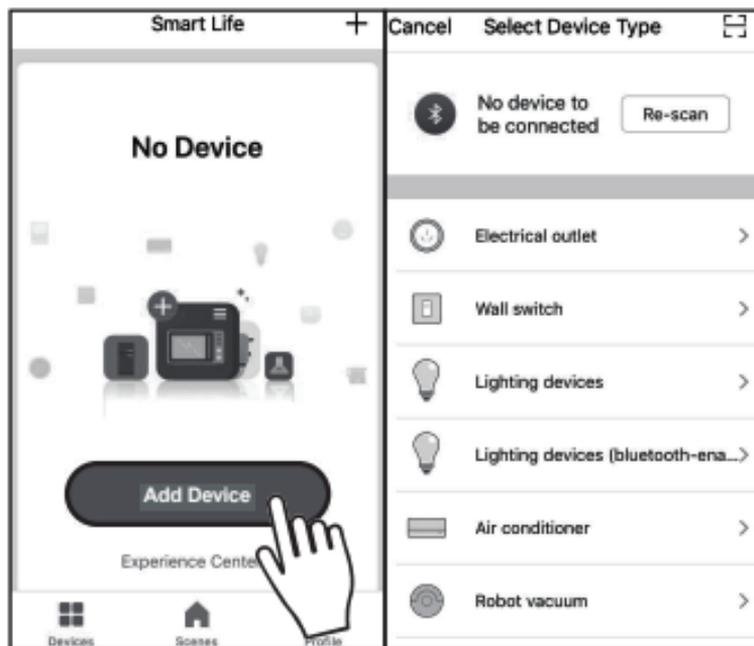


6. On the smart plug, press and hold the power button for 5 seconds (until blue LED indicator flashes rapidly) to enter connection mode

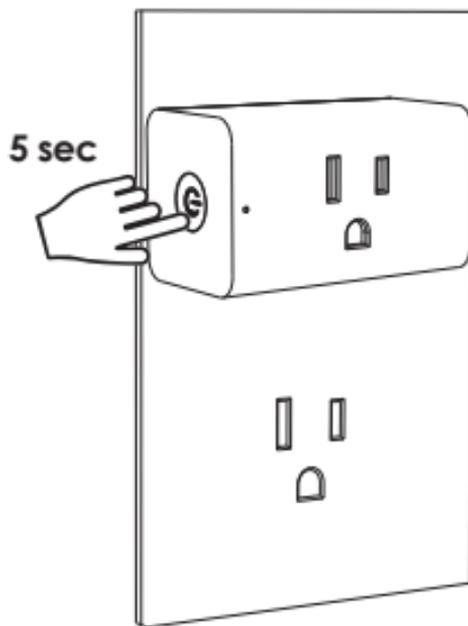

7. On the app, tap **Confirm indicator rapidly blink**, enter your Wi-Fi password, and then confirm

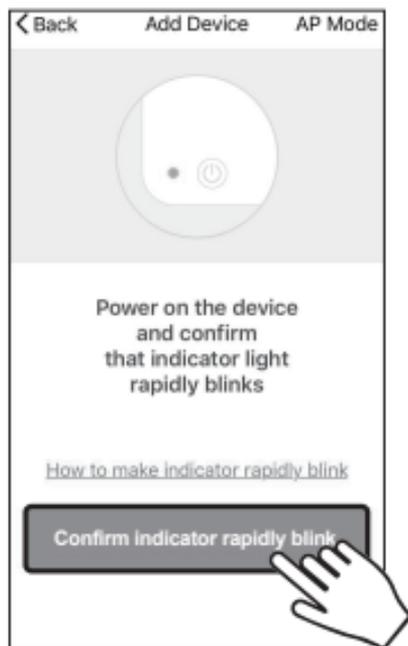


8. Once connected, setup is complete and you can start using the smart plug to control power to the device that's plugged into it

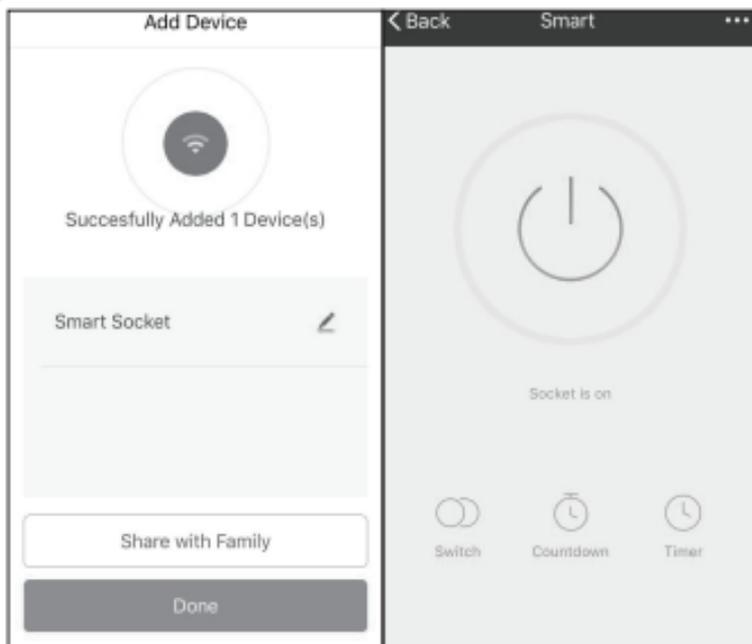

AP Mode

If quick setup isn't successful for any reason, you can use the **AP mode** to manually configure your smart plug (see in-app instructions on how to set up).

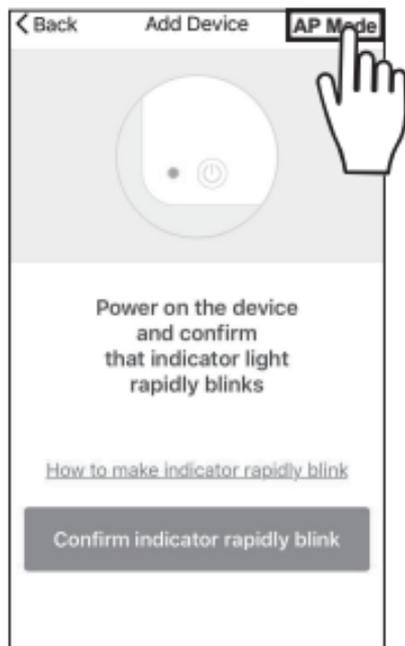

LED Indicator


Indicator	Status
Off	Power off
Flashing Blue Slowly	Power on
Flashing Blue Rapidly	Connecting
Red	Connected

Using the Smart Plug Countdown

Set this to automatically turn on or off device plugged into the smart plug after time has elapsed.


Timer

Set up a schedule of specific times and days to automatically turn on or off appliance plugged into the smart plug. Great for organizing and simplifying your daily life.

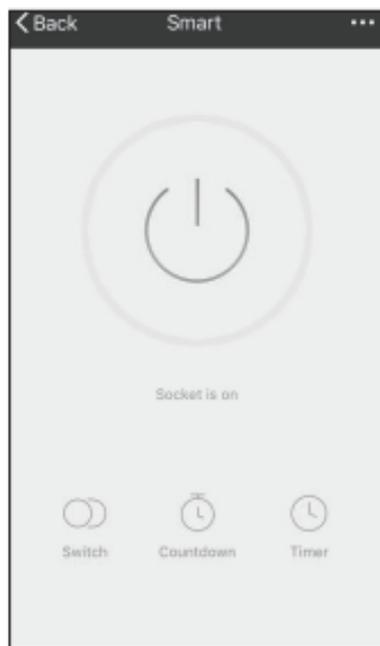


Create your own Scene

Set multiple devices to automatically turn on or off together in specific situations, like switching things on when you get home.

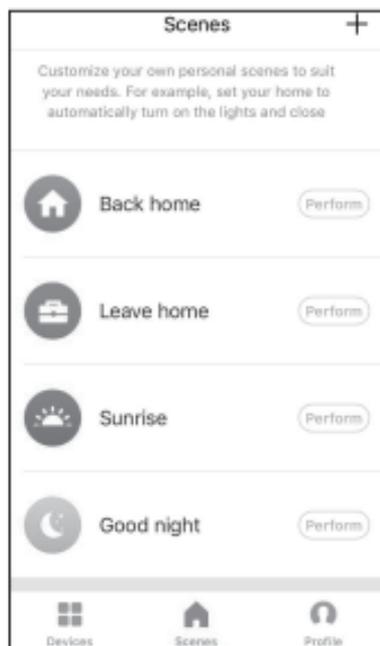


Connecting to Amazon Alexa

1. Launch the **Amazon Alexa app** and access **Skills** on the Main Menu

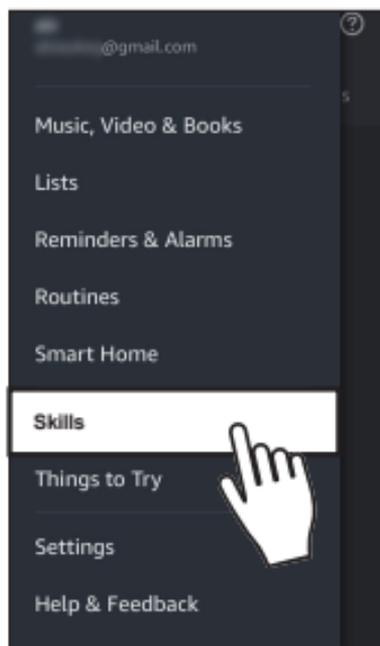

2. Search for and select the **Smart Life** app; then tap **ENABLE**

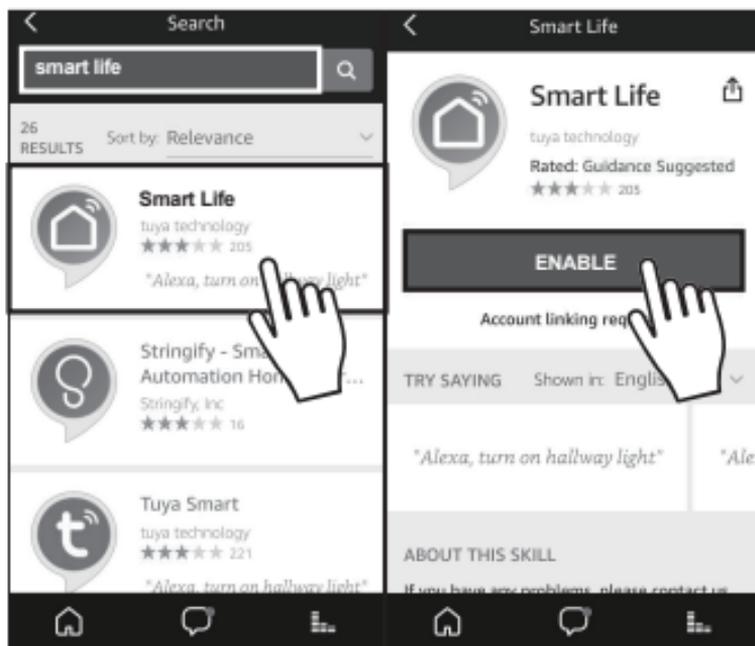

3. Enter login details for the Smart Life app and tap **Link Now**




4. Tap **DISCOVER DEVICES** and wait for Alexa to discover the smart plug. Once discovered, you can start using the smart plug with Alexa




Connecting to Google Home

1. Launch **Google Home app**. In Home control, tap the **+** button to add device

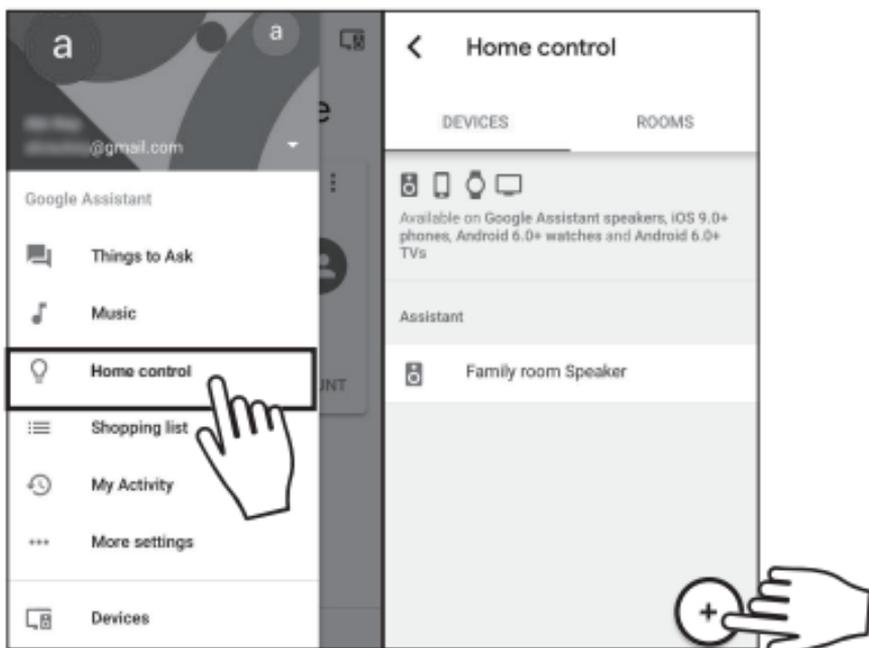

2. Search for and select the **Smart Life** app. Enter login details for Smart Life app and tap **Link Now**

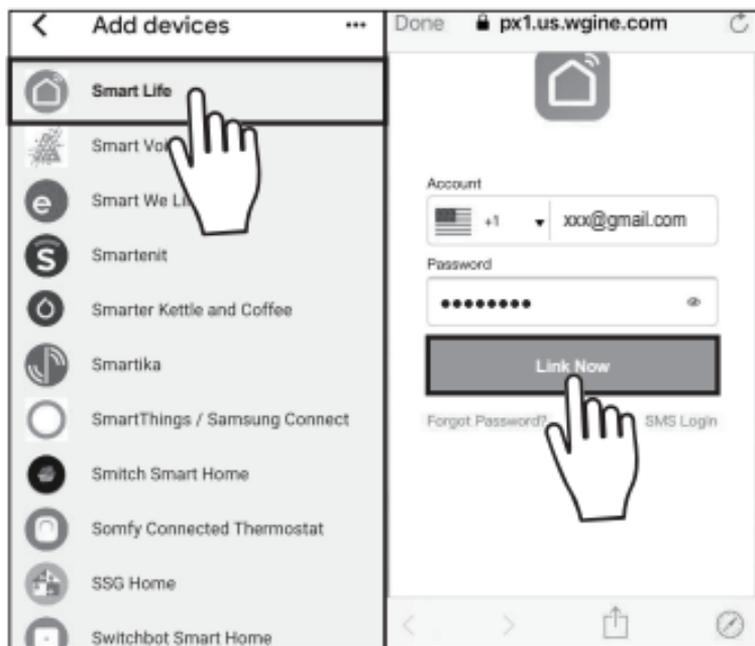

3. Return to Home control to view connected smart home devices, including the linked smart plug

Q&A

What can be connected to the smart plug?

Lights, fans, portable heaters, and other small appliances with a maximum output of 1800W.

Why won't my device connect to the smart plug?

- Ensure that the pairing mode on the smart plug is enabled (press and hold the power button for 5 seconds; blue indicator flashing rapidly)
- Ensure that your device and the smart plug are connected to the same Wi-Fi network

Product Care

- Keep away from liquids and extreme heat
- Don't exceed the maximum power output of 1800W

Warranty & Customer Support

For questions, support, or warranty claims, contact us at the address below that corresponds with your region. Please include your Amazon order number and product model number.

Amazon US orders: support.us@aukey.com

Amazon EU orders: support.eu@aukey.com

Amazon CA orders: support.ca@aukey.com

Amazon JP orders: support.jp@aukey.com

*Please note, AUKEY can only provide after sales service for products purchased directly from AUKEY. If you have purchased from a different seller, please contact them directly for service or warranty issues.

Model: SH-PA1

AUKEY International Ltd.

www.aukey.com | support@aukey.com

No.102, Building P09, Electronics Trade Center
Huanan City, Pinghu Town, Longgang District
Shenzhen, Guangdong, 518111, CN

RoHS

Made in China

FCC ID:2AFHP-SH-PA1

